


REV	DATE	DESCRIPTION	ECO	SIGN
1	2/16/11	RELEASE FOR QUOTE		BKM

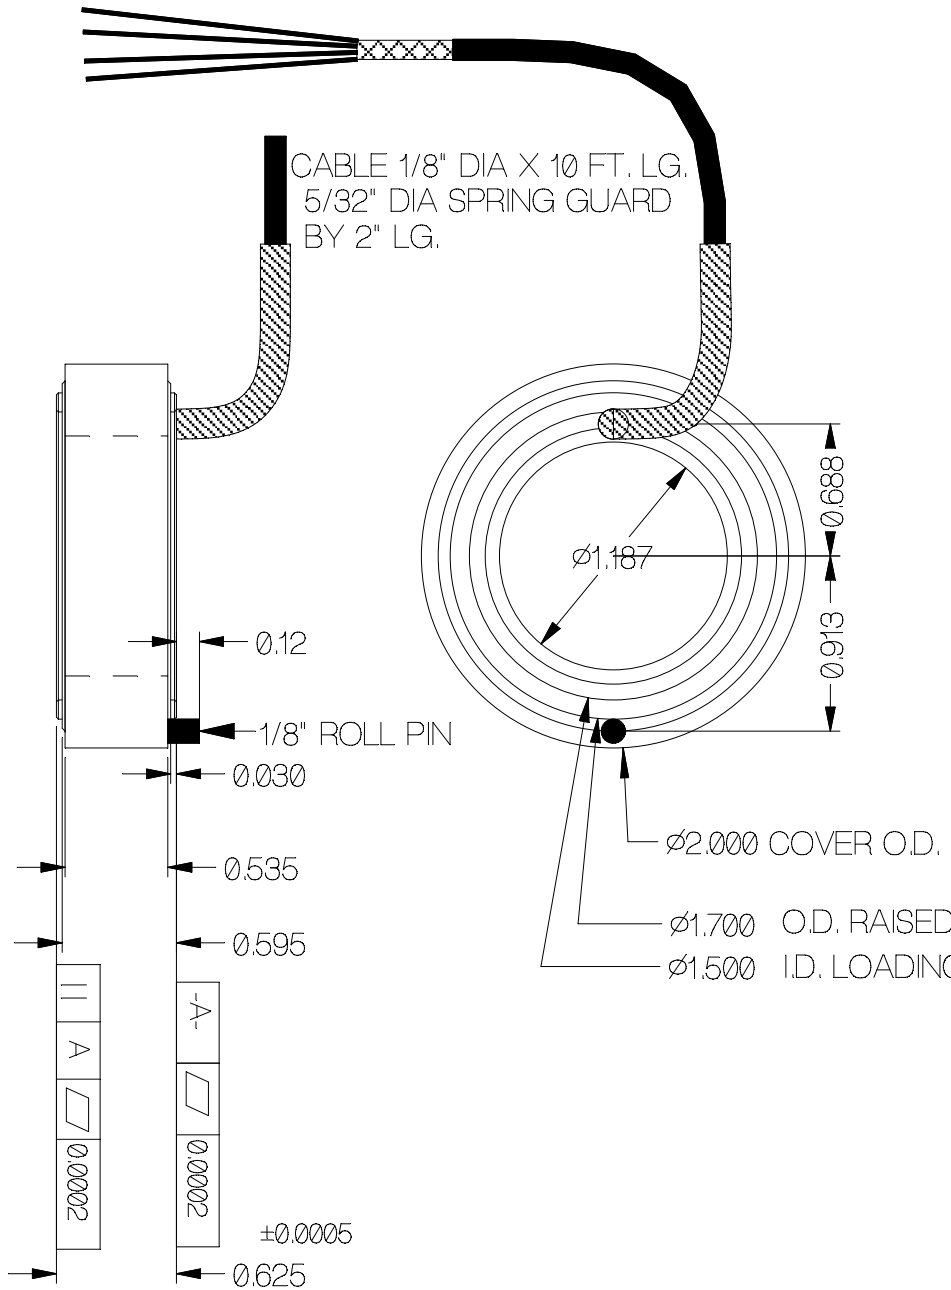

SPECIFICATIONS:

RATED CAPACITY	20,000 POUNDS
RATED OUTPUT, (G.F. 4)	2 mV/V typical
COMBINED ERROR	± 1 %
NON-REPEATABILITY	< 0.05 %
ZERO BALANCE	± 10 %
TEMPERATURE RANGE, COMPENSATED	+60 TO 160° F
TEMPERATURE EFFECT, OUTPUT	0.0015 % of Load / ° F
TEMPERATURE EFFECT, ZERO BALANCE	Not rated
BRIDGE IMPEDANCE	700 OHMS, typical
EXCITATION VOLTAGE (typical)	5 VDC or VAC rms
EXCITATION VOLTAGE, MAXIMUM	10 VDC or VAC rms
INSULATION RESISTANCE	5,000 MEG OHMS @ 50 VDC
MAXIMUM LOAD, SAFE	150 % F.S.
MAXIMUM LOAD, ULTIMATE	200 % F.S.
CONSTRUCTION	ALLOY STEEL ELEMENT, STAINLESS COVER

WIRE COLOR CODE:

+ EXCITATION	GREEN
- EXCITATION	BLACK
+ SIGNAL	WHITE
- SIGNAL	RED
SHIELD	GROUND

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 XXX = ± 0.005
 XX = ± 0.015
 X = ± 0.025

SCALE: FULL

FINISH: 32 MICRO IN. OR LESS ALL SURFACES
 MAT'L: A2
 HARDNESS: Rc 40-46



Designed By: Mettert
 Drawn By:
 Approved By:

Date: 2/16/11
 Date:
 Date:

Title / Description:
 SS1607-20K POUND
 DOUGHNUT LOAD CELL
 SPECIFICATIONS

Dwg. Size: A
 Dwg. Type: SPEC

Part No. SS1607-20K
 File Name 16937
 Doc. No. 16937