



REV.	DATE	DESCRIPTION	ECO	SIGN
1	2/25/2014	RELEASE FOR PRODUCTION		BKM
4	3/10/18	ADDED M8 RECEPTACLE, CABLE BY CUSTOMER		BKM

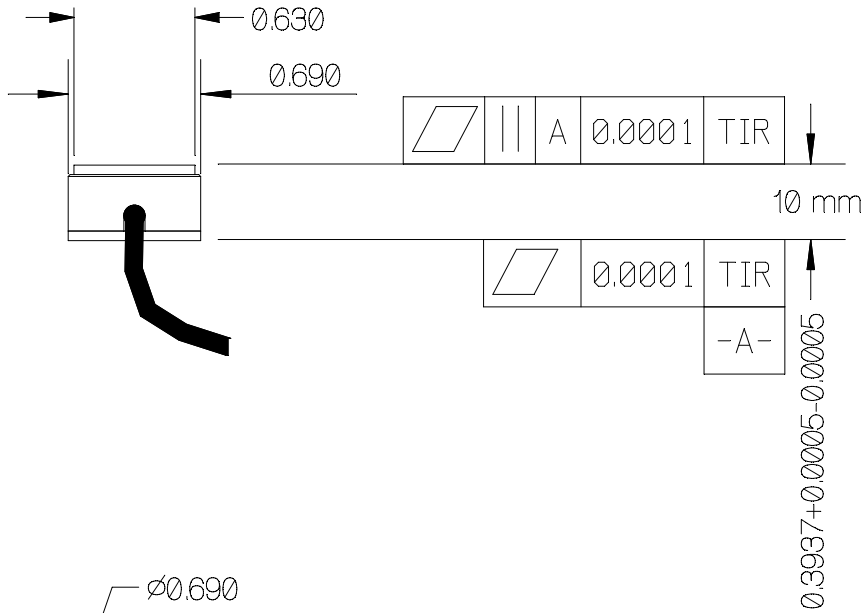

SPECIFICATIONS:

Rated Capacity	10,000 lbs
Rated Output, MATCHED 0.1%	2 mV/V
Combined Error	1.5 %
Nonrepeatability	0.05 %
Zero Balance	± 10 %
Temperature Range, Compensated	+60° to + 160° F
Temperature Effects, Output	0.02 %/° F
Temperature Effects, Zero Balance	0.02 %/° F
Input Impedance, typical	350 / 400 ohms
Output Impedance, typical	350 ohms
Excitation Voltage, (typical)	10 VDC or AC rms
Excitation Voltage, Maximum	15 VDC or AC rms
Insulation Resistance	5,000 Megohms at 50 VDC
Maximum Load, Safe	150 %
Maximum Load, Ultimate	200 %

COLOR CODE:

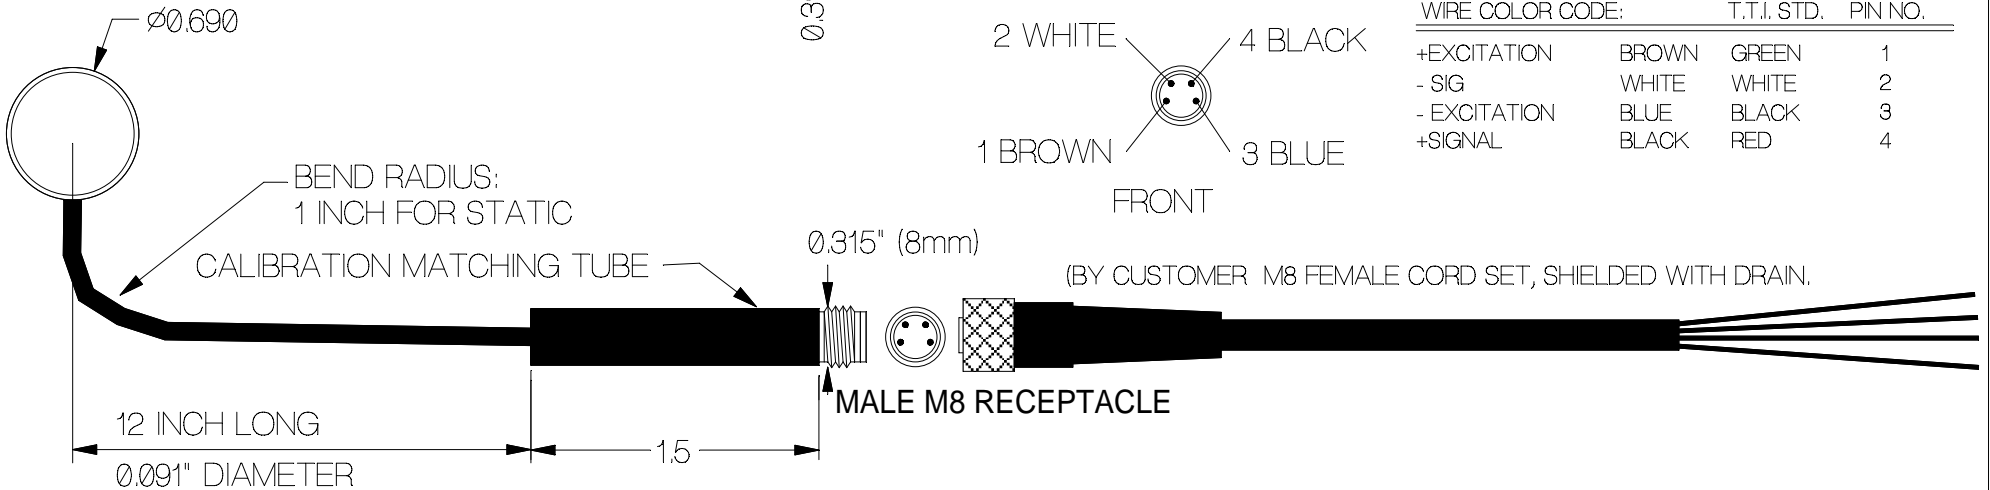

WIRE COLOR CODE:	T.T.I. STD.	PIN NO.
+EXCITATION	BROWN GREEN	1
- SIG	WHITE WHITE	2
- EXCITATION	BLUE BLACK	3
+SIGNAL	BLACK RED	4

<p>TOLEDO TRANSDUCERS, INC.</p>	Designed By: Mettert	Date: 2/25/2014	Title / Description: M8 REC.		Part No. SS1680M8-10K
	Drawn By:	Date:	SS1680M8-10K LB		File Name 17398M8
	Approved By:	Date:	Dwg. Size: A	Dwg. Type: SPEC	Doc. No. 17398M8